

CONSTRUCTION NOTES

1. THIS DRAWING IS ONLY TO BE USED WITH STANDARD DRAINING NUMBER PA-003 WITH BMS INSIDE ROOTED STAKING FACILITY.
2. ALL NOTES ON SHEET PA-003C APPLY.
3. CONSTRUCT BMS.

2" X 4" NAILER,
WITH 4 20d NAILS
PER FOOT INTO DOUBLE
WALL PLANKS

— 2" X 4" STIFFENER
AT MIDPOINT

REDRAWN: TJA 7/05

Designed TJM Date 7/98
 Drawn SHD 7/98
 Checked _____
 Approved by _____

_____ COUNTY, PENNSYLVANIA


INTERIOR POULTRY CARCASS COMPOSTER




PL-0634.docx

PI-0434

ADAPTED FROM DE 810,002;
AND DE 810,005.1

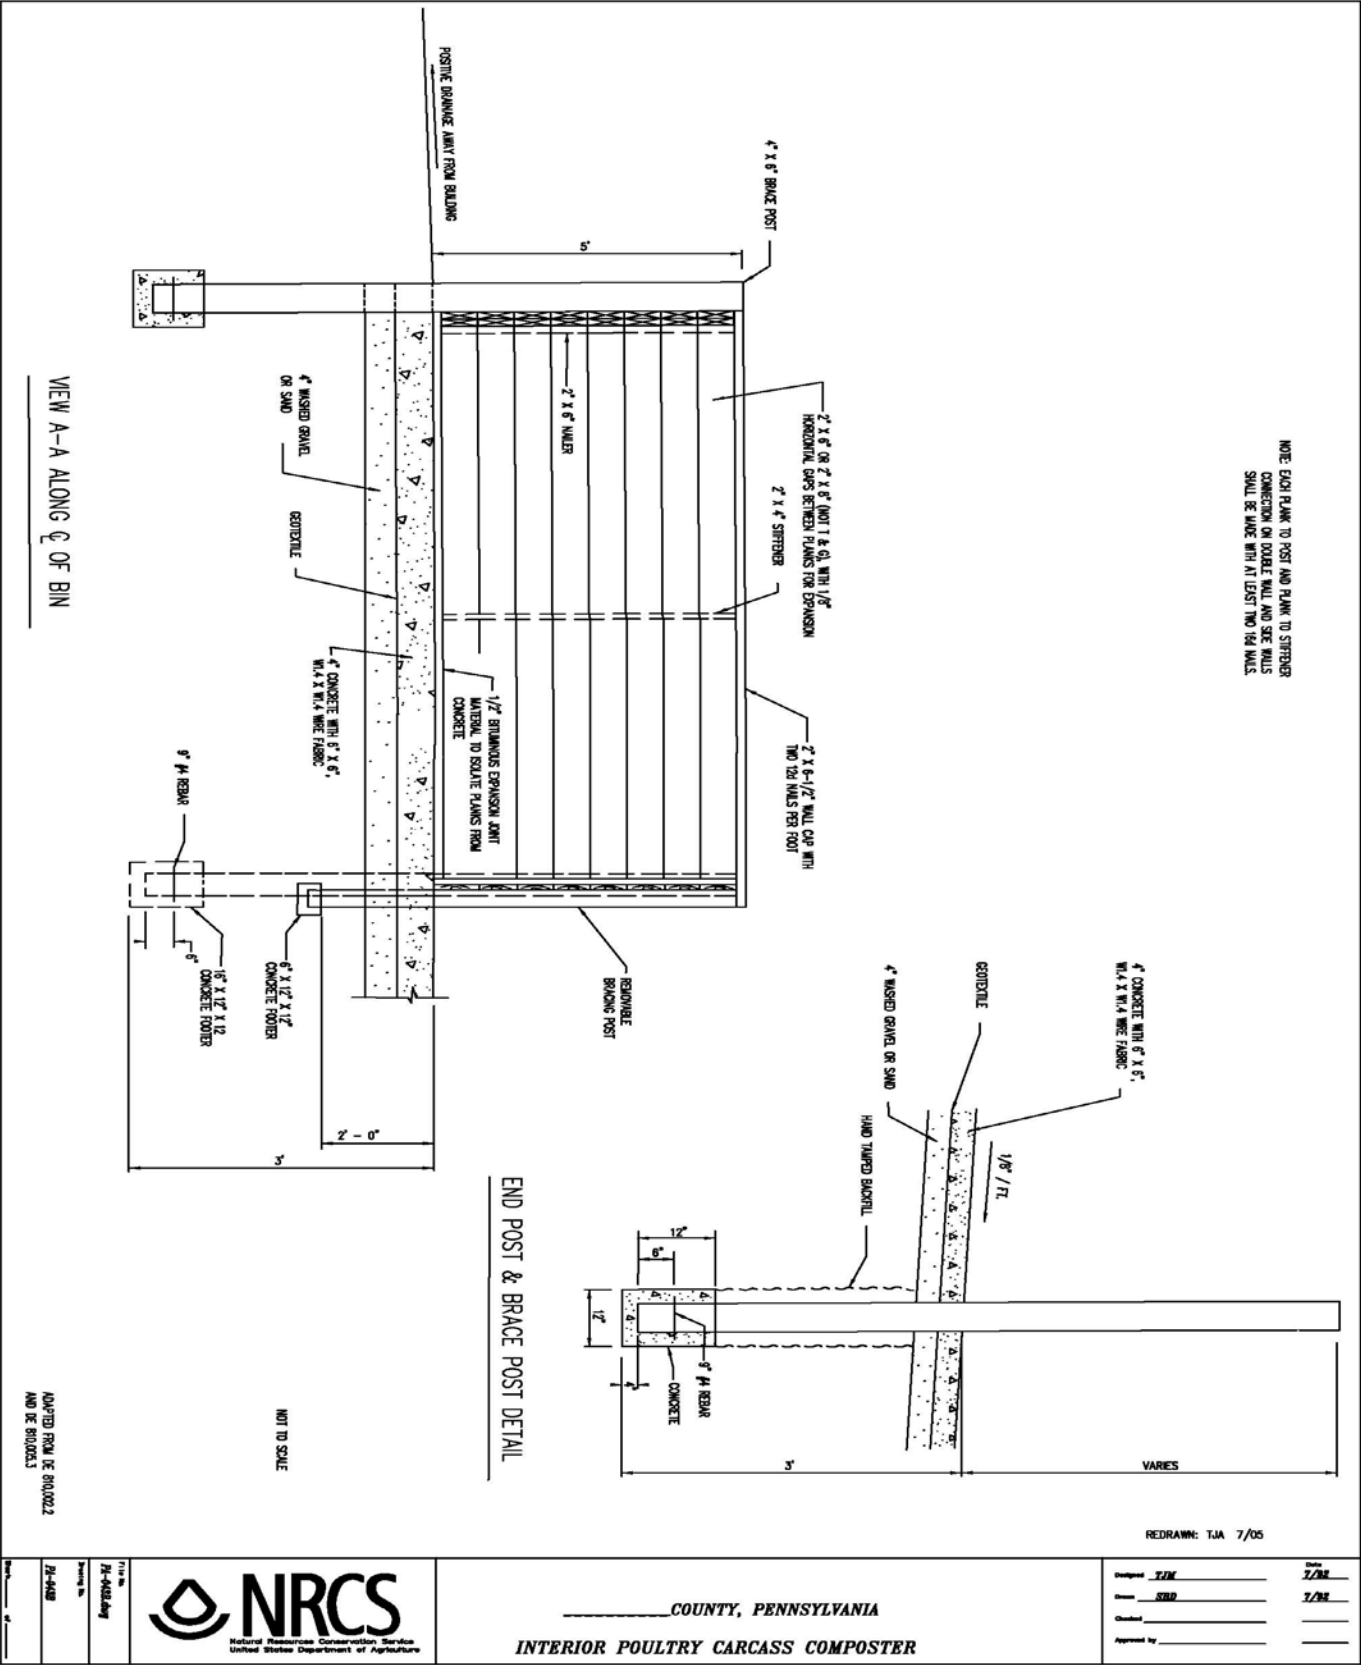

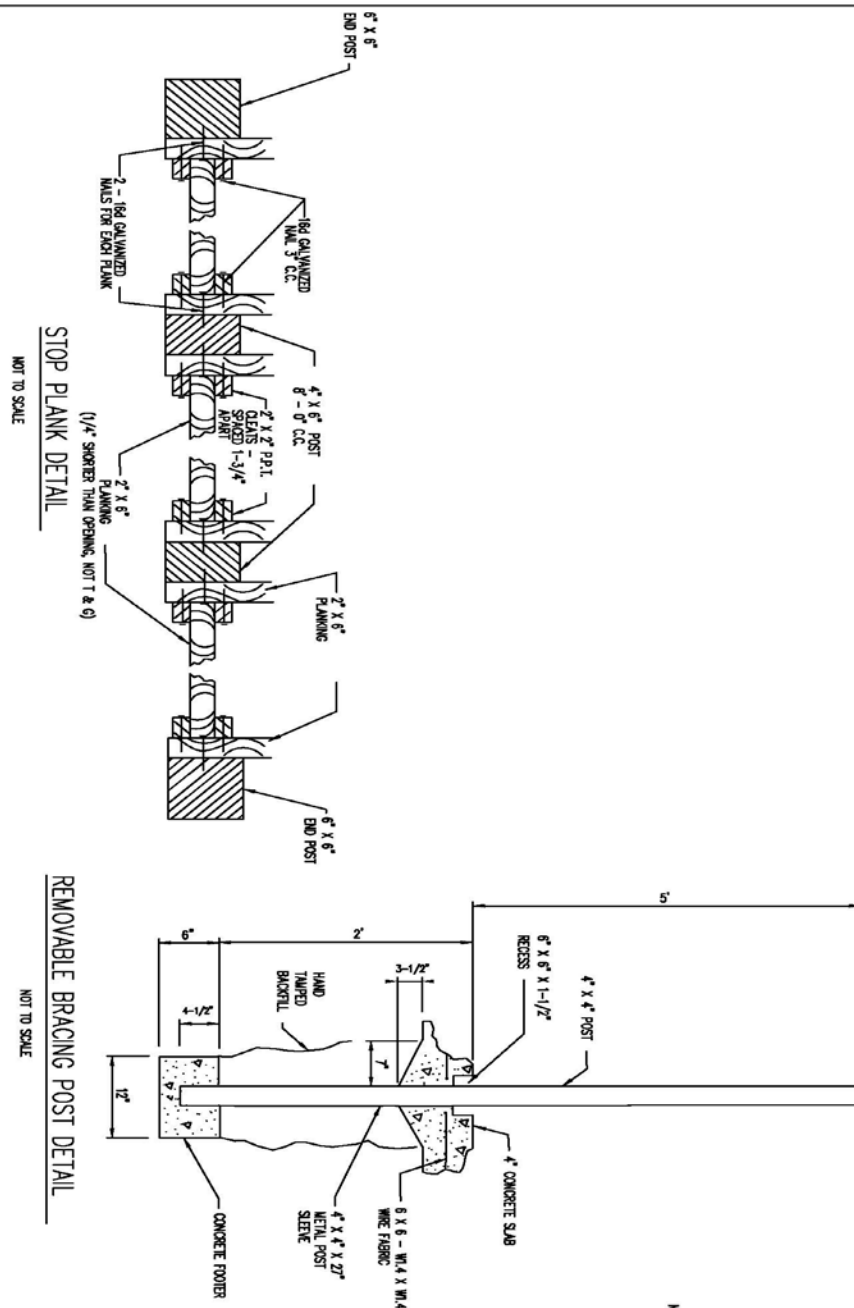

NOTE: SUPPLY 2" X 6" X 5-1/2" BLOCK
FOR RECESS AT EACH REMOVABLE
BRACING POST.

REDRAWN: TJA 7/05

Designed TJM Date 7/98
 Drawn SKD 7/98
 Checked _____
 Approved by _____

_____COUNTY, PENNSYLVANIA

INTERIOR POULTRY CARCASS COMPOSTER



ADAPTED FROM DE 810,005.1